


KW-BSE-04(尼龙)

通用加载垫

Local Loading Pad

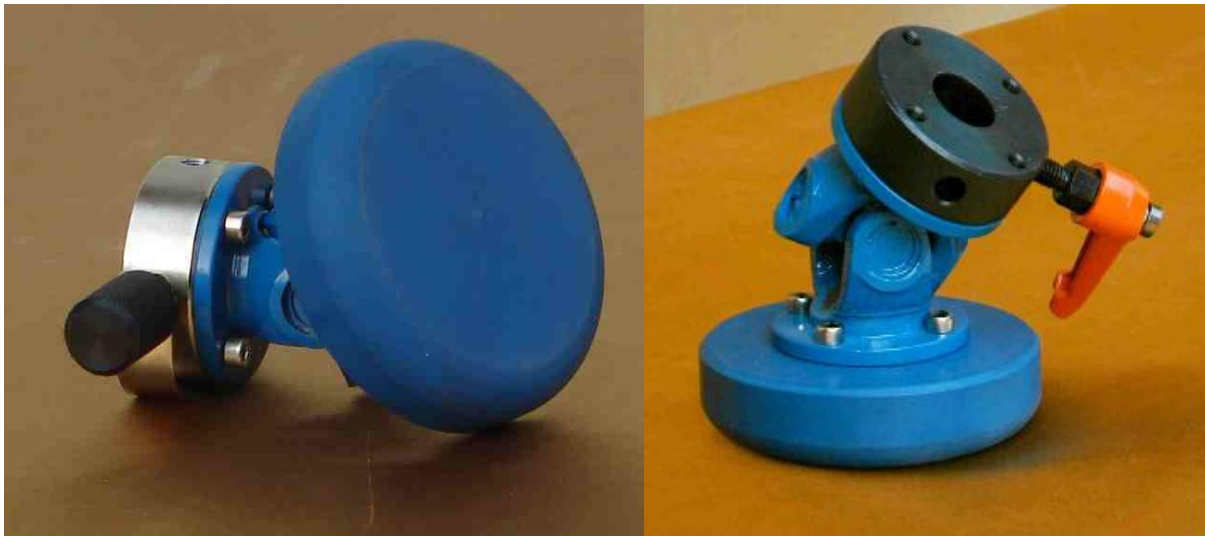

Technical:

Field of application	EN 527-3:2003 4.3 Loading pad for the application of vertical forces	垂直负荷加载用垫			
	ENV 581-2:2000 5.10 Local loading pad	通用加载垫			
	BS EN 747-2:2007 Fig.3 loading pad	通用加载垫			
	EN 1725:1998 5.11 Small loading pad	小型加载垫			
	EN 1728:2001 5.8 local loading pad	通用加载垫			
	EN 1730:2000 5.6 loading pad	加载垫			
	BS EN 1335-3:2009 5.5 local loading pad	通用加载垫			
Structure characteristics	1.Plastic materials manufacturing and made by precise CNC process				
	2 .Asseble the universal joint, 25 degree swing angle.				
	3 Simple 'plug' style connect. Easy assemble and disassemble.				
Parameter	Dia 200mm column, .300 mm radius spherical surface, Joint edge: R12 Chamfer.				
Main parts	Part Name	Function	Material	Surface Treatment	Color
	Foam-device	Provide Loading	Hardwood	Paint	Blue/Black
	Universal joint	Fit to any change	Steel	Electrophoretic-coated	Blue
	Adapter	Connect the out-force	Steel	Passivation;	Nickel
	Plug Adapter	Relax	Stainless steel and spring	Tempering	Black
Weight	1.1 Kg				



Kingwells

东莞市锦辉试验设备制造厂

Kingwells Test Equipment Mfg., Ltd.

地址:广东省东莞市南城区白马方屋岔村1巷1号

电话: 86-769-22906718 传真: 86-769-22909619

Web: www.kingwells.com

E-Mail: info@kingwells.com